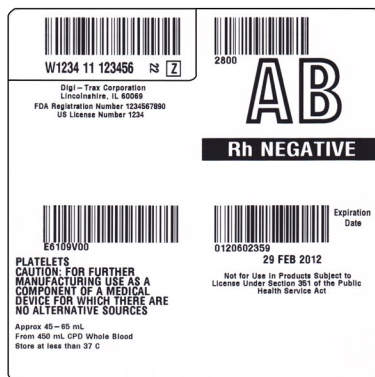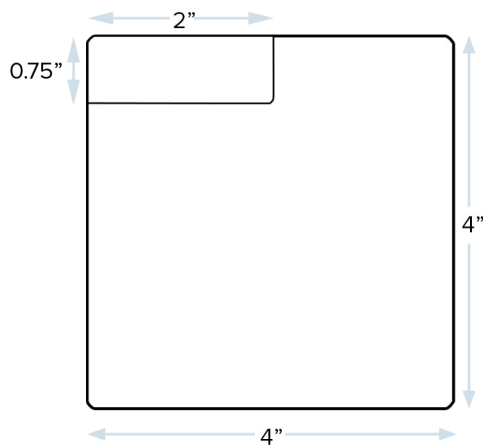# Digi-Trax® Blank ISBT 128 Labels & Ribbons for Desktop Printers

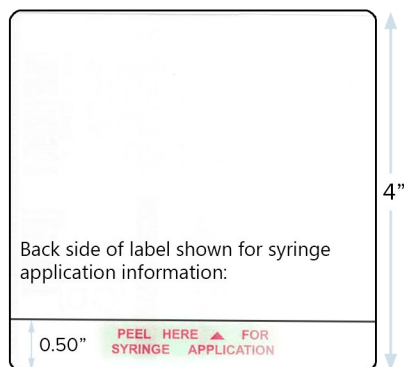**Samples of Printed Labels, Additional Formats Available**

ISBT-44-G-KT printed sample

ISBT-44-G-KT

4" x 4" thermal transfer synthetic label
DIN in place, perforation between labels
500/roll
4 rolls per case
2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')
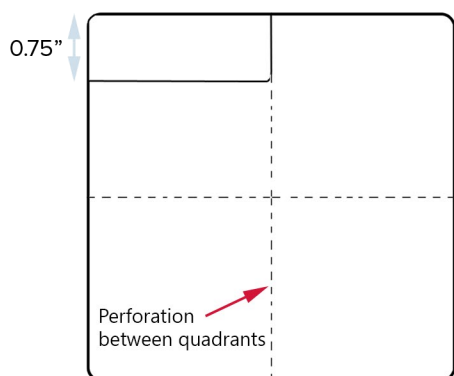
ISBT-44-PEEL-CG-KT

DIN in place, no perf for desktop printers with peel option
4" x 4" thermal transfer label
500/roll
4 rolls per case
2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')

Back side of label shown for syringe application information:

ISBT-44-SYRINGE-G-KT Back side of label shown to illustrate syringe application information

ISBT-44-SYRINGE-G-KT

4" x 4" thermal transfer synthetic label
Note: ½" x 4" peel-off section for syringe on back side
DIN in place, perforation between labels
500/roll
4 rolls per case
2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')



Perforation between quadrants

ISBT-44-MULTI-G-KT

4" x 4" thermal transfer synthetic label
Note: perfed in quadrants for use as 4 x 2 or 2 x 2
DIN in place, perforation between labels
500/roll
4 rolls per case
2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')

Work In Process Label
Temporary applications, direct thermal label, no ribbon required

WIP-44Y-G printed sample

WIP-44Y-G
4" x 4" blank **direct thermal** yellow label
Non-stock, contact us for delivery times

ISBT-44-REMOVED-G-KT

4" x 4" thermal transfer synthetic label
Note: DIN cut out removed, perf between labels
DIN in place, perforation between labels
500/roll
4 rolls per case
2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')

ISBT-44-REMVD-PEEL-CG-KT

4" x 4" thermal transfer synthetic label
Note: DIN cut out removed, no perforation for desktop printers with peel option
DIN in place, perforation between labels
500/roll, 4 rolls per case, 2,000 labels total
4 rolls of RR-CT-G4 ribbon (4.33" x 243')

Digi-Trax® Blank ISBT 128 Labels & Ribbons for Desktop Printers

Desktop

Samples of Printed Labels, Additional Formats Available
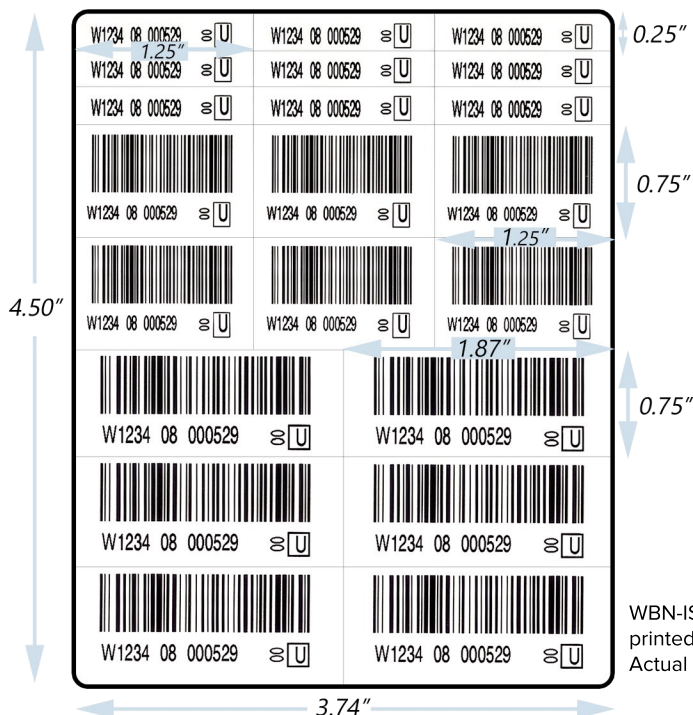
WBN-ISBT-GC-KT

3.74" x 4.5" thermal transfer synthetic label
250 per roll
6 rolls per case
1,500 labels total
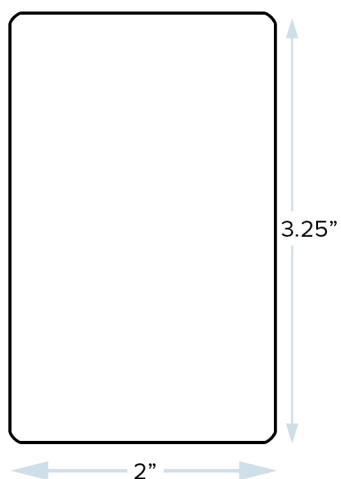3 rolls of RR-CT-G4 ribbon (4.33" x 243')

Note:
DIN (6 large bag barcodes, 6 small tube barcodes, 9 eye read pigtails). This is the ISBT 128 stock configuration.

Custom configurations of DINs and other labels are available, call 800-356-6126
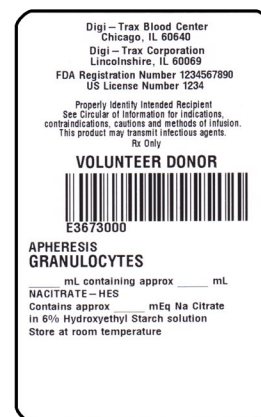

WBN-ISBT-GC-KT printed sample
Actual label is blank

ISBT-2323-G-KT

Facility Product label
2" x 3.25" thermal transfer synthetic label
700 per roll
2 rolls per case
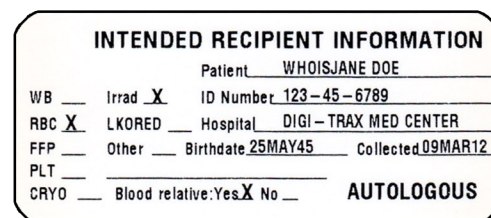1,400 labels total
2 rolls of RR-CT-G2 ribbon (2 ½" x 243')

ISBT-2323-G-KT printed sample

ISBT-IR-G-KT

Note: Can be used to print: Intended Recipient Information Label
2½" x 1" thermal transfer synthetic label
2,300 per roll
1 roll per case
2,300 labels total
1 roll of RR-CT-G2 ribbon (2 ½" x 243')

ISBT-IR-G-KT printed sample

DIGI-TRAX®
identify your future

www.digi-trax.com
info@digi-trax.com   800-356-6126

rev 8-11-2023 A   ©2023 Digi-Trax

Digi-Trax® Blank ISBT 128 Labels & Ribbons for Desktop Printers

Desktop

Samples of Printed Labels, Additional Formats Available


ISBT-22-G-KT printed sample

ISBT-22-G-KT printed sample

ISBT-22-G-KT

2" x 2" thermal transfer synthetic label
1200 per roll
4 rolls per case
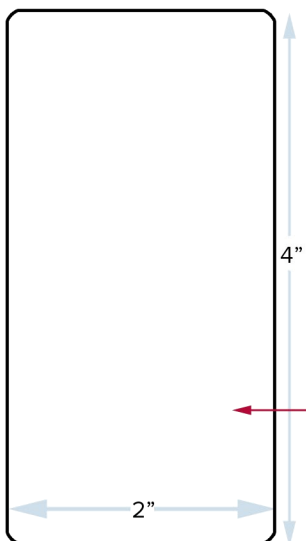4,800 labels total
4 rolls of RR-CT-G2 ribbon (2.5" x 243')

WIP-22Y-G printed sample

Work In Process Label
Temporary applications, Direct thermal label, No ribbon required
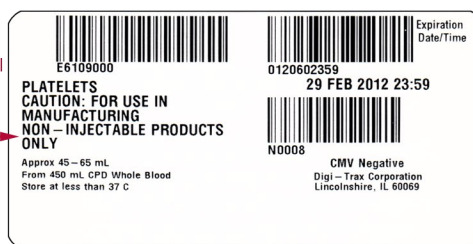**Non-stock, contact us for delivery times**

WIP-22Y-G
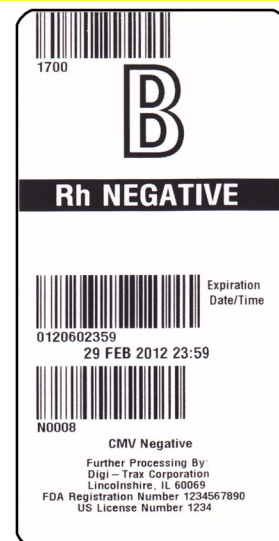**2" x 2"** blank **direct thermal** yellow label

ISBT-42-CG-KT

4" x 2" thermal transfer synthetic label
1,200 per roll
2 rolls per case
2,400 labels total
2 rolls of RR-CT-G4 ribbon (4.33" x 243')

The 2 quadrant label can be printed vertically or horizontally, depending on the printer's orientation and application.

ISBT-42-CG-KT printed sample

ISBT-42-CG-KT printed sample

Ribbons

for desktop printers

For use with: ISBT-22-G-KT, ISBT-2323-G-KT, ISBT-IR-G-KT:
RR-CT-G2 2.5" x 243'

ISBT-42-CG-KT, ISBT-42-Syringe-G, WBN-ISBT-GC, all ISBT-44 labels:
RR-CT-G4 4.33" x 243'

ISBT 128 Starter Pack

ISBT 128 **starter pack** for desktop printers, including ribbons
Product # **ISBT-STARTER-KIT-G**

1 roll of ISBT-44-G-KT   1 roll of ISBT-42-G-KT   1 roll of ISBT-22-G-KT

1 roll of WBN-ISBT-GC-KT   1 roll RR-CT-G4 ribbon

DIGI-TRAX®
identify your future

www.digi-trax.com
info@digi-trax.com   800-356-6126

rev 8-11-2023 A   ©2023 Digi-Trax

Digi-Trax® ISBT 128 label specifications

Special care must be taken when applying to any frozen products since the recommended minimum application temperature from adhesive manufacturers is -20°F (-29°C). Once properly applied to an acceptable surface, these labels will remain serviceable from 200ºF (93ºC) to cryogenic temperatures starting at -65°F (–54ºC) (these are the and lower temperature limits per the manufacturer). Testing each individual application is recommended.

Minimum application temp:
-20°F (-29°C)
hand application required

Service temp range:
-65°F to +200°F(-54°C to +93°C)
special handling may be required for use with FFP

Shelf life:
Digi-Trax label material has a standard shelf life of one year from date of shipment from Digi-Trax® when stored at 72°F (22°C) at 50% RH. If exposed to elevated temperatures for an extended period time (more than 30 days), the adhesive properties may be diminished.

Supplies are sold and shipped in "Cases" that have been designed for use with our certified desktop bar code label blood bank printers.

Each "Case" contains a matched quantity of labels and ribbons to eliminate waste.

The synthetic label material has been laboratory tested and matched with special resin ink ribbons to meet rigorous standards required as per the ISBT-128 compliant print specifications. It meets durable print standards set forth in the FDA Guidelines.

The adhesive coating meets FDA; CFR21, Sec. 175.105 requirements for direct and indirect bag applications.

The label and ribbon combination is designed to withstand freezing, water bath, bleach disinfecting and repeated abrasion and will not wrinkle, shred, or smudge. The durable thermal transfer ink image printing will remain legible under these harsh conditions.

All Digi-Trax® thermal transfer blood bank labels feature high initial tack and ultimate adhesion. In addition, our adhesives offer good resistance to U.V., plasticizers and water.

To order:

Email: orders@digi-trax.com
FAX: 847-465-9055
Call: 800-356-6126

For questions or free printed samples:

Call 800-356-6126 or email us at info@digi-trax.com

DIGI-TRAX®
identify your future